


不锈钢直板滚子链


Stainless Steel Roller Chain with Straight Side Plate

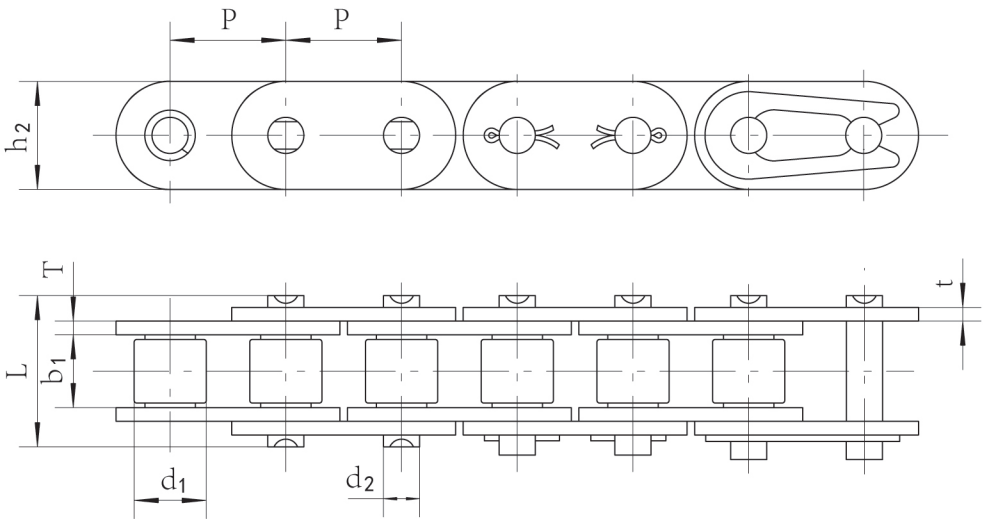

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		内链板高度 Inner plate depth	链板厚度 Plate thick – ness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米净重 Weight per meter
				直径 Dia	长度 Length					
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	h ₂ (max) mm	t/T mm	Q(min) KN	Q ₀ KN	q kg/m
C40SS-1	12.7	7.92	7.85	3.96	16.6	12	1.52	11.6	12.7	0.72
C50SS-1	15.875	10.16	9.40	5.08	20.5	15	2.0	20.9	23	1.22
C60SS-1	19.05	11.91	12.57	5.94	25.3	18	2.4	25.5	27	1.80
C80SS-1	25.4	15.88	15.75	7.92	32.7	23.5	3.2	44.59	47	3.10
C100SS-1	31.75	19.05	18.9	9.53	39.8	30.18	4.0	58.9	65	4.55
C120SS-1	38.1	22.23	25.22	11.1	50.3	35.7	4.8	78	82	6.87
C08BSS-1	12.7	8.51	7.75	4.45	17	11.8	1.65	12	12.2	0.82
C10BSS-1	15.875	10.16	9.65	5.08	19.2	14.6	1.65	14.9	16.2	1.07
C12BSS-1	19.05	12.07	11.68	5.72	22	16	1.8	17.4	17.7	1.33
C16BSS-1	25.4	15.88	17.02	8.28	35.3	20.9	3.2/4	40.6	46.7	3.10
C20BSS-1	31.75	19.05	19.56	10.19	40.4	26	3.6/4.5	56	64.3	4.18
C24BSS-1	38.1	25.4	25.4	14.63	53.4	33.4	4.8/6	96	115.6	7.48

不锈钢直板滚子链


Stainless Steel Roller Chain with Straight Side Plate

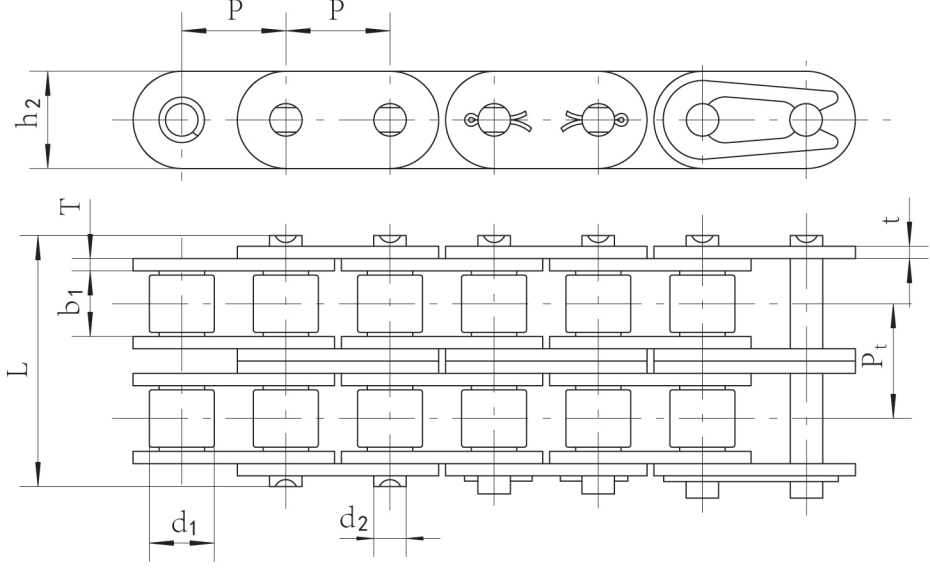

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		内链板高度 Inner plate depth	链板厚度 Plate thick – ness	排距 Trans – verse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米净重 Weight per meter
				直径 Dia	长度 Length						
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	h ₂ (max) mm	t/T mm	Pt mm	Q(min) KN	Q ₀ KN	q kg/m
C40SS-2	12.7	7.92	7.85	3.96	31	12	1.52	14.38	23.2	25.4	1.44
C50SS-2	15.875	10.16	9.40	5.08	38.5	15	2.0	18.11	41.8	46	2.45
C60SS-2	19.05	11.91	12.57	5.94	48.1	18	2.4	22.78	51	52	3.59
C80SS-2	25.4	15.88	15.75	7.92	62	23.5	3.2	29.29	89.18	94	6.14
C100SS-2	31.75	19.05	18.9	9.53	76.4	30.18	4.0	35.76	117.8	130	9.12
C120SS-2	38.1	22.23	25.22	11.1	95.8	35.7	4.8	45.44	156	164	13.7
C08BSS-2	12.7	8.51	7.75	4.45	31	11.8	1.65	13.92	22.5	23.5	1.46
C10BSS-2	15.875	10.16	9.65	5.08	35.8	14.6	1.65	16.59	29.8	31.5	2.05
C12BSS-2	19.05	12.07	11.68	5.72	41.5	16	1.8	19.46	34.6	35.2	2.67
C16BSS-2	25.4	15.88	17.02	8.28	67.2	20.9	3.2/4	31.88	78	89.7	6.14
C20BSS-2	31.75	19.05	19.56	10.19	77.7	26	3.6/4.5	36.45	110	125.3	8.25
C24BSS-2	38.1	25.4	25.4	14.63	101.8	33.4	4.8/6	48.36	168	191.5	14.78

不锈钢直板滚子链

Stainless Steel Roller Chain with Straight Side Plate

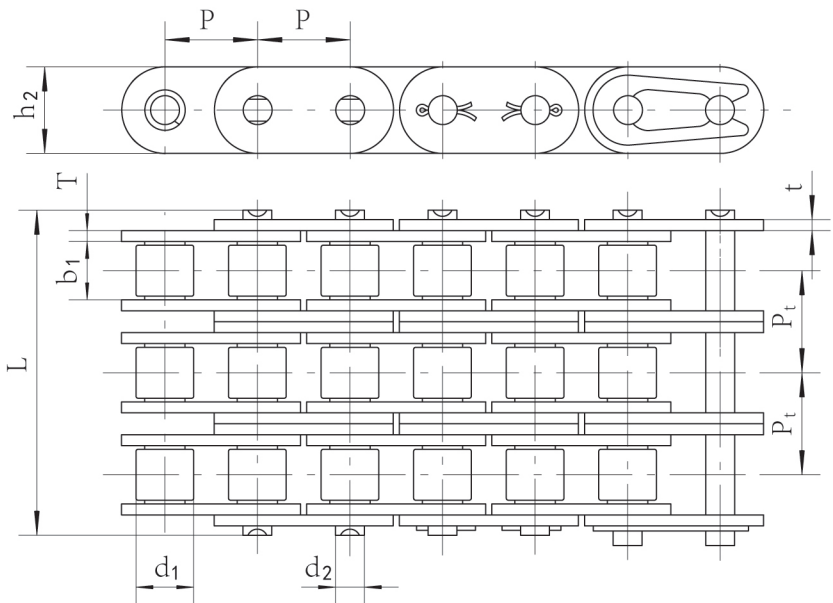

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		内链板高度 Inner plate depth	链板厚度 Plate thick – ness	排距 Trans – verse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米净重 Weight per meter
				直径 Dia	长度 Length						
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	h ₂ (max) mm	t/T mm	Pt mm	Q(min) KN	Q ₀ KN	q kg/m
C40SS-3	12.7	7.92	7.85	3.96	45.5	12	1.52	14.38	34.8	38.1	2.15
C50SS-3	15.875	10.16	9.40	5.08	56.8	15	2.0	18.11	62.7	69	3.64
C60SS-3	19.05	11.91	12.57	5.94	71	18	2.4	22.78	76.5	81	5.37
C80SS-3	25.4	15.88	15.75	7.92	91.4	23.5	3.2	29.29	133.77	141	9.13
C100SS-3	31.75	19.05	18.9	9.53	112.2	30.18	4.0	35.76	176.7	195	13.62
C120SS-3	38.1	22.23	25.22	11.1	141.4	35.7	4.8	45.44	234	246	20.45
C08BSS-3	12.7	8.51	7.75	4.45	45	11.8	1.65	13.92	31	32.8	2.14
C10BSS-3	15.875	10.16	9.65	5.08	52.7	14.6	1.65	16.59	37.8	43.6	2.89
C12BSS-3	19.05	12.07	11.68	5.72	61.5	16	1.8	19.46	52	61	3.9
C16BSS-3	25.4	15.88	17.02	8.28	99.7	20.9	3.2/4	31.88	108	124.2	9.12
C20BSS-3	31.75	19.05	19.56	10.19	114.3	26	3.6/4.5	36.45	151.2	173.6	11.32
C24BSS-3	38.1	25.4	25.4	14.63	150.4	33.4	4.8/6	48.36	255	285.4	22.12