


不锈钢单铰链式带硫化橡胶顶直输平顶链 Stainless Steel Single Hinge Straight Running Flat Top Chains with Vulcanized Rubber Pad

812GT/815GT系列 812GT/815GT Series

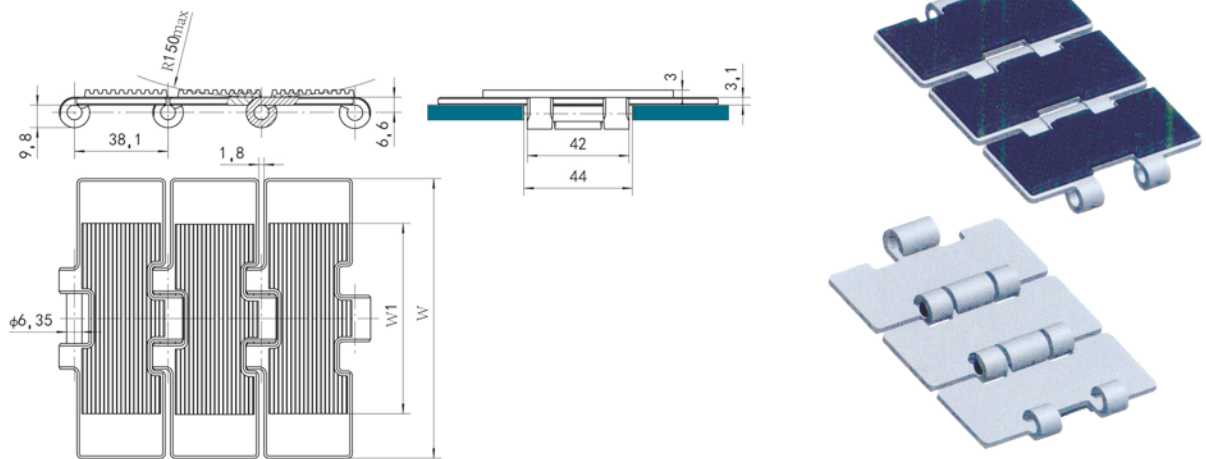


链号 Chain No.	链板 Plate		橡胶顶 Rubber Pad		屈服强度 Yield Strength $\sigma_{0.2}$		重量 weight			
	材料 material	宽度 (Width)W		材料 material	宽度 (Width)W1		kN	lbf	kg/m	lb/ft
		mm	inch		mm	inch				
C13S GT	马氏体型铬不锈钢	82.5	3 1/4	丁腈橡胶 butadiene acrylonitrile rubber	77.6	3 1/18	6.25	1,406	2.77	1.86
C18S GT	Martensitic Chromium Stainless Steel	114.3	4 1/2						3.49	2.34
SS 812-K325 GT	铁素体型铬不锈钢	82.5	3 1/4				5.8	1,305	2.76	1.85
SS 812-K450 GT	Ferritic Chromium Stainless Steel	114.3	4 1/2						3.47	2.33
SSA 815-K325 GT	奥氏体型铬镍不锈钢	82.5	3 1/4				8	1.8	2.83	1.90
SSA 815-K450 GT	Austenitic Chromium-Nickel Stainless Steel	114.3	4 1/2						3.57	2.40

- 说明: 1. 基型链条为815/812系列。链号后缀“GT”表示金属链板的工作面上粘合橡胶, 以提供一个良好的防滑效果。应用于止滑动要求高或角度不大于20°的倾斜输送机上;
2. 工作温度-30°C到+120°C;
3. 具有高的耐油、耐油脂、耐酸性能;
4. 同一宽度的金属链板有三种不同的材料可供选择, 以适应不同的工作场合;
5. 供货时, 每条链条的标准长度为3.048m (10ft), 计80节。

- Note: 1. The basic chain is 815/812 Series. The suffix “GT” affixed on the chain no. indicates the working surface of the metal plate is fastened together with rubber, providing a good grip effect. The series are used on an inclined conveyor with a higher requirement of limited-slip or with an angle less than 20° inclusive.
2. For the metal plates with a same width, there are 3 kinds of different materials to be available as an option, using to many different workplaces.
3. Working temperature: from -30°C to +120°C.
4. With the properties of high oil resistance, grease resistance and acid-resisting.
5. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.

不锈钢双铰链式带硫化橡胶顶直输平顶链 Stainless Steel Double Hinge Straight Running Flat Top Chains with Vulcanized Rubber Pad

802GT/805GT系列 802GT/805GT Series

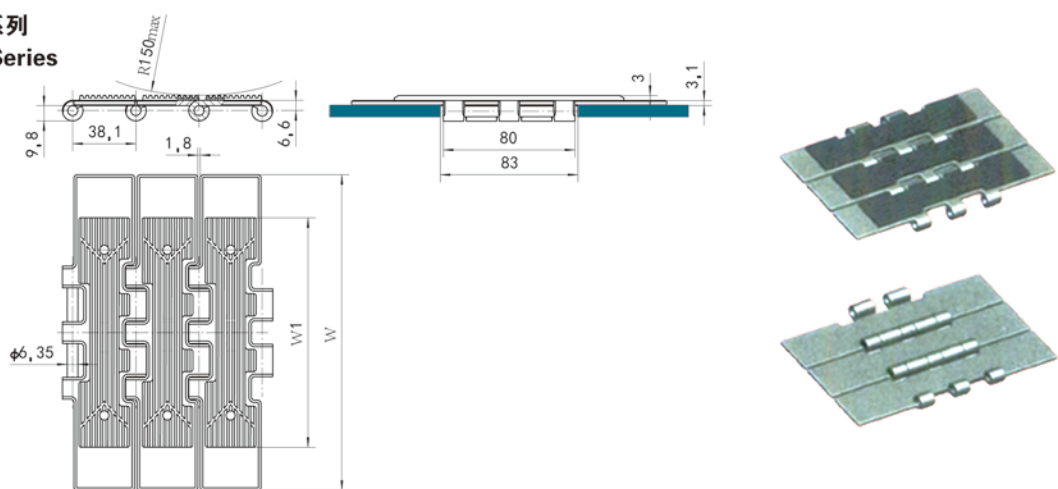

链号 Chain No.	链板 Plate		橡胶顶 Rubber Pad		屈服强度 Yield Strength $\sigma_{0.2}$		重量 weight			
	材料 material	宽度 (Width)W		材料 material	宽度 (Width)W1		kN	lbf	kg/m	lb/ft
		mm	inch		mm	inch				
C30D GT	马氏体型铬不锈钢	190.5	7 1/2	丁腈橡胶 butadiene acrylonitrile rubber	140.00	5 22/43	12.5	2,812	6.05	4.07
SS 802-K750 GT	铁素体型铬不锈钢						11.6	2.61	5.98	4.02
SSA 805-K750 GT	奥氏体型铬镍不锈钢						16	3.6	6.11	4.11

- 说明: 1. 基型链条为805/802系列。链号后缀“GT”表示金属链板的工作面上粘合橡胶, 以提供一个良好的防滑效果。应用于止滑动要求高或角度不大于20°的倾斜输送机上;
2. 同一宽度的金属链板有三种不同的材料可供选择, 以适应不同的工作场合;
3. 工作温度-30°C到+120°C;
4. 具有高的耐油、耐油脂、耐酸性能;
5. 供货时, 每条链条的标准长度为3.048m (10ft), 计80节。

- Note: 1. The basic chain is 805/802 Series. The suffix “GT” affixed on the chain no. indicates the working surface of the metal plate is fastened together with rubber, providing a good grip effect. The series are used on an inclined conveyor with a higher requirement of limited-slip or with an angle less than 20° inclusive.
2. For the metal plates with a same width, there are 3 kinds of different materials to be available as an option, using to many different workplaces.
3. Working temperature: from -30°C to +120°C.
4. With the properties of high oil resistance, grease resistance and acid-resisting.
5. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.