


## 不锈钢单铰链式直输平顶链 Stainless Steel Single Hinge Straight Running Flat Top Chains

### 512/515系列

### 512/515 Series

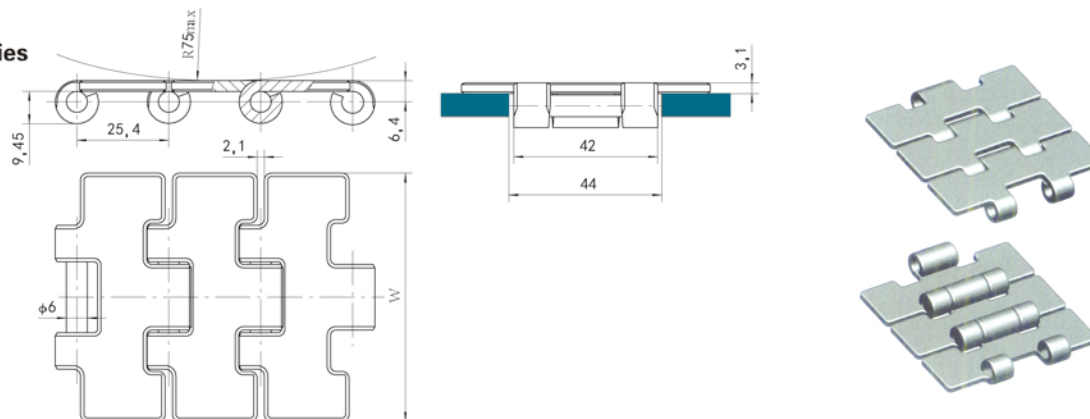

链号 Chain No.	链板 Plate			屈服强度 Yield Strength $\sigma_{0.2}$		重量 weight		
	材料 material	表面粗糙度 Surface finish	宽度 (Width)W		kN	lbf	kg/m	lb/ft
		$\mu m$	mm	inch				
MS 515-K217	马氏体型铬不锈钢 Martensitic Chromium Stainless Steel	0.8	55	2 1/6	6.25	1.406	2.33	1.56
MS 515-K250			63.5	2 1/2			2.52	1.69
MS 515-K283			71.5	2 5/6			2.71	1.82
MS 515-K297			75.5	2 35/36			2.78	1.87
MS 515-K325			82.6	3 1/4			2.94	1.97
MS 515-K350			88.9	3 1/2			3.08	2.07
MS 515-K388			98	3 36/41			3.29	2.21
MS 515-K400			101.6	4			3.36	2.26
SS 512-K217	铁素体型铬不锈钢 Ferritic Chromium Stainless Steel	0.6	55	2 1/6	5.8	1.305	2.33	1.56
SS 512-K250			63.5	2 1/2			2.52	1.69
SS 512-K283			72	2 5/6			2.71	1.82
SS 512-K297			75.5	2 35/36			2.78	1.87
SS 512-K325			82.5	3 1/4			2.94	1.97
SS 512-K350			88.9	3 1/2			3.08	2.07
SS 512-K388			98.5	3 36/41			3.29	2.21
SS 512-K400			101.6	4			3.36	2.26
SSA 515-K217	奥氏体型铬镍不锈钢 Austenitic Chromium-Nickel Stainless Steel	0.3	55	2 1/6	8	1.8	2.38	1.60
SSA 515-K250			63.5	2 1/2			2.57	1.73
SSA 515-K283			72	2 5/6			2.76	1.85
SSA 515-K297			75.5	2 35/36			2.84	1.91
SSA 515-K325			82.5	3 1/4			3.00	2.01
SSA 515-K350			88.9	3 1/2			3.14	2.11
SSA 515-K388			98.5	3 36/41			3.36	2.26
SSA 515-K400			101.6	4			3.43	2.30

- 说明：1. 链条节距为25.4mm，比标准链条的节距小，是一种紧凑性设计，适于窄尺寸零件输送。在啤酒行业，主要是应用在洗瓶机设备的进出瓶装置上；
2. 同一宽度的链板有三种不同的材料可供选择，以适应不同的工作场合；
3. 供货时，每条链条的标准长度为3.048m（10ft），计120节。

- Note: 1. The pitch of the chain is 25.4mm, smaller than the one of standard chains, and it is a compact conveyor design, suitable for the transportation of narrow dimensional components. In beer industry, these chains are mainly used on bottle input and output device of bottle washing equipment.
2. For the plates with s same width, there are 3 kinds of different materials to be available as an option, using to many different workplaces.
3. When supplied, the standard length of each chain is 3.048m（10ft），totaling 120 links.