



屠宰链

Slaughter chain



安徽黄山中友链条制造有限公司
HUANGSHAN ZHONGYOU CHAIN CO.,LTD.

2024

BRIEF INTRODUCTION

公司简介

安徽黄山中友链条制造有限公司成立于2000年，积累了26年的设计、生产技术和经验。公司占地面积47000平方米，现有职工230人。

我们公司的主要产品包括：糖机链，棕榈油链，水泥链，污水处理链，沥青搅拌链，铺路机链，挖沟机链，钢制销合链，农机链，不锈钢滚子链，不锈钢平顶链。我们生产的链条符合ISO,ANSI,DIN,BS AND JIS 标准。每道生产工序都受ISO9001质量管理体系控制。生产的产品完全符合客户要求。性能可靠，品质卓越。

公司采用先进的技术，不断创新，坚持安全可靠和卓越的性能。在互相尊重，互惠双赢的基础上，和客户建立发展亲密稳定长久的合作伙伴关系。不断成就非凡。

您关注了我们，选择了我们，您的生产线，您的设备良好运行的时间就会延长，生产效率和效益就会明显提高。

Huangshan Zhongyou chain manufacture Co.,Ltd of Anhui was founded in 2000, have Accumulated 26 years' chain design、 manufacture technology and experience. The company covers an area of 47000 square meters,now have 230 employees .


Our main products including: sugar mill chain,palm oil chain,cement chain, Sewage processing chain, Asphalt mixing chain, paver chain,ditcher chain,steel pintle chain,agricultural chain, stainless steel roller chain,stainless steel flat top chain,all the chains we produced are conform to ISO,ANSI,DIN,BS and JIS standard.In every production procedure are all closely controlled by the ISO9001 quality Guarantee system,Products we manufactured are fully meet customer' s requirements,reliable performance, unsurpassed in its quality.

Company adopt the advanced technology and constant Innovation. Adhering to the commitment to safe,reliable and excellence performance ,based on mutual respect and mutual benefit and win-win, To establish and develop close,long and stable cooperation partnership with customers ,ongoing extraordinary achievements.

You follow us,selected us,your production line, your devices running time will be extended, productivity and efficiency will be significantly improved.




拖钩链 Towing hook chain

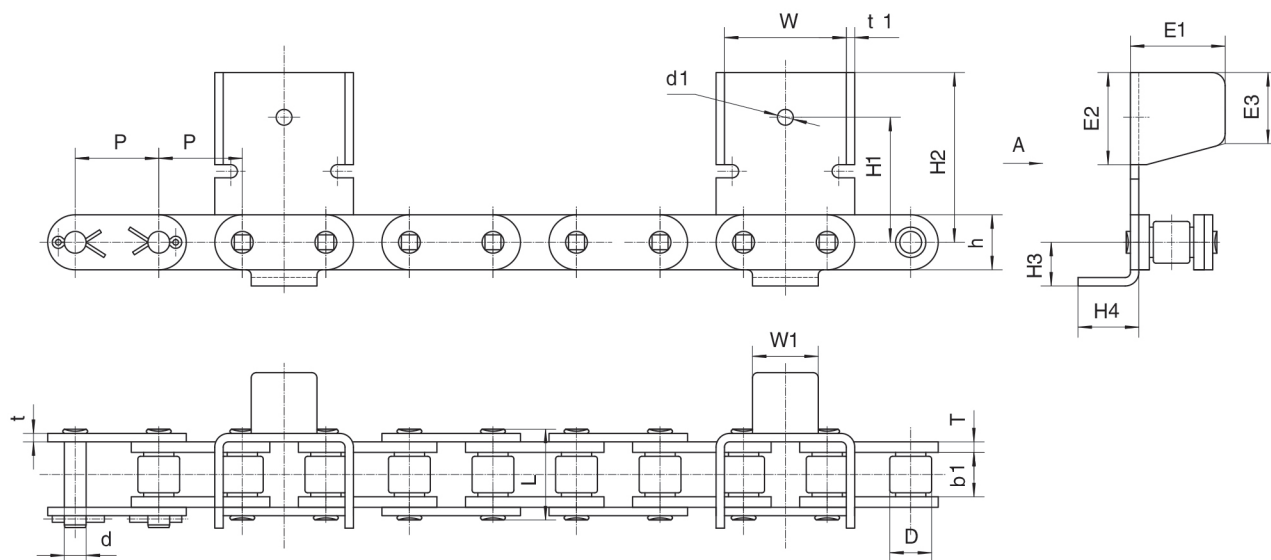

链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚子外径 roller diameter	销轴 Pin		链板 Sidebar		最小抗拉强度 Ultimate tensile strength
	P mm	b1(min) mm	D(max) mm	d mm	L mm	h mm	t/T mm	Fu(min) kN
16BSS-31.75-FU · 6P	31.75	17.02	15.88	8.28	35.3	20.9	3.2/4	42

链号	W1	W	t1	d1	H1/H2	H3/H4	E1	E2	E3
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm
16BSS-31.75-FU · 6P	21	46.5	3.2	6	47.5/64.5	16.6/23.1	36	35	27


拖钩链 Towing hook chain

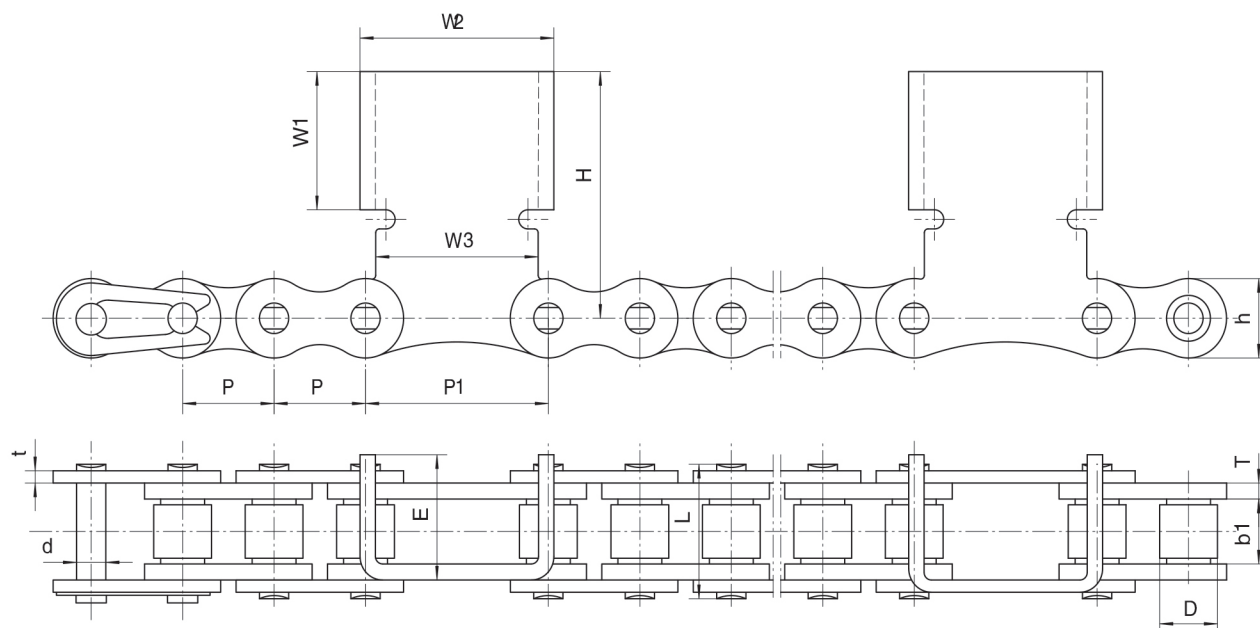

链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚子外径 roller diameter	销轴 Pin		链板 Sidebar		最小抗拉强度 Ultimate tensile strength
	P/P1 mm	b1(min) mm	D(max) mm	d mm	L mm	h mm	t/T mm	Fu(min) kN
P(25.4-50.03)SS-FU	25.4/50.03	17.02	15.88	8.28	35.3	20.9	3.2/4	42

链号	W1	W2	W3	E	H
Chain No.	mm	mm	mm	mm	mm
P(25.4-50.03)SS-FU	36.2	53	44.4	32.8	64.6


悬挂链 Dependent chain

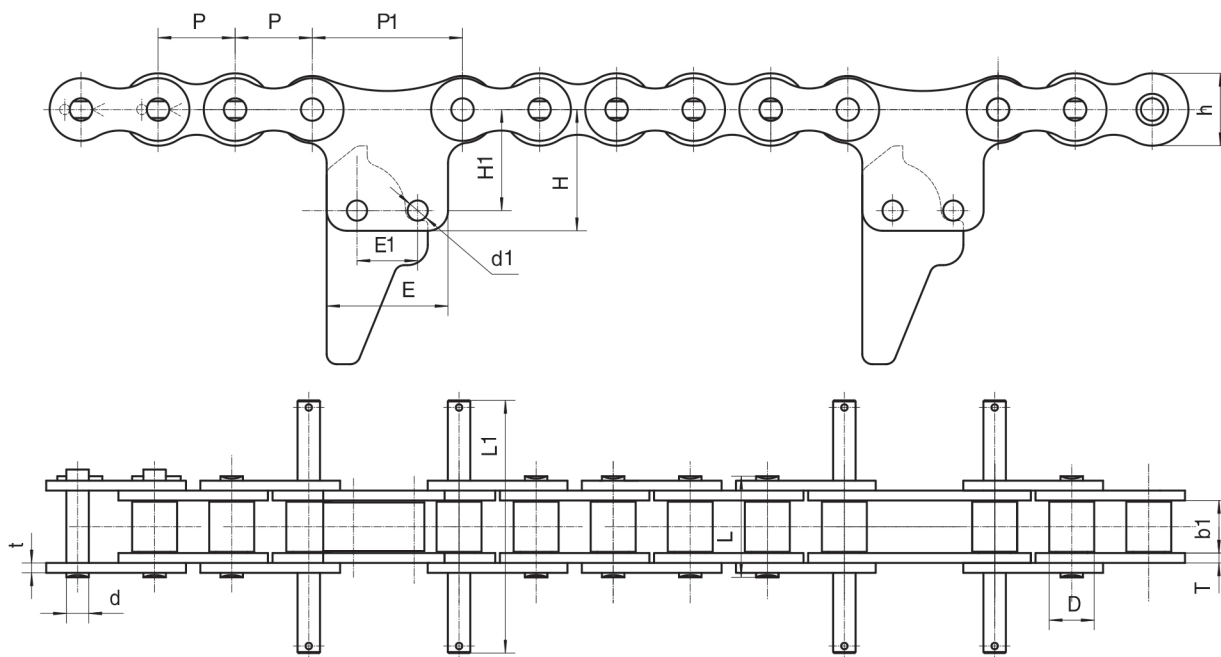

链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚子外径 Roller diameter	销轴 Pin		链板 Sidebar		最小抗拉强度 Ultimate tensile strength
	P/P1 mm	b1(min) mm	D(max) mm	d mm	L/L1 mm	h mm	T/t mm	Fu(min) kN
120SS+P74.3-F	38.1/74.3	25.22	22.23	11.1	50/125	35.8	4.8	78


链号	E	E1	d1	H1	H
Chain No.	mm	mm	mm	mm	mm
120SS+P74.3-F	60	30	10	50	60

悬挂链 Dependent chain

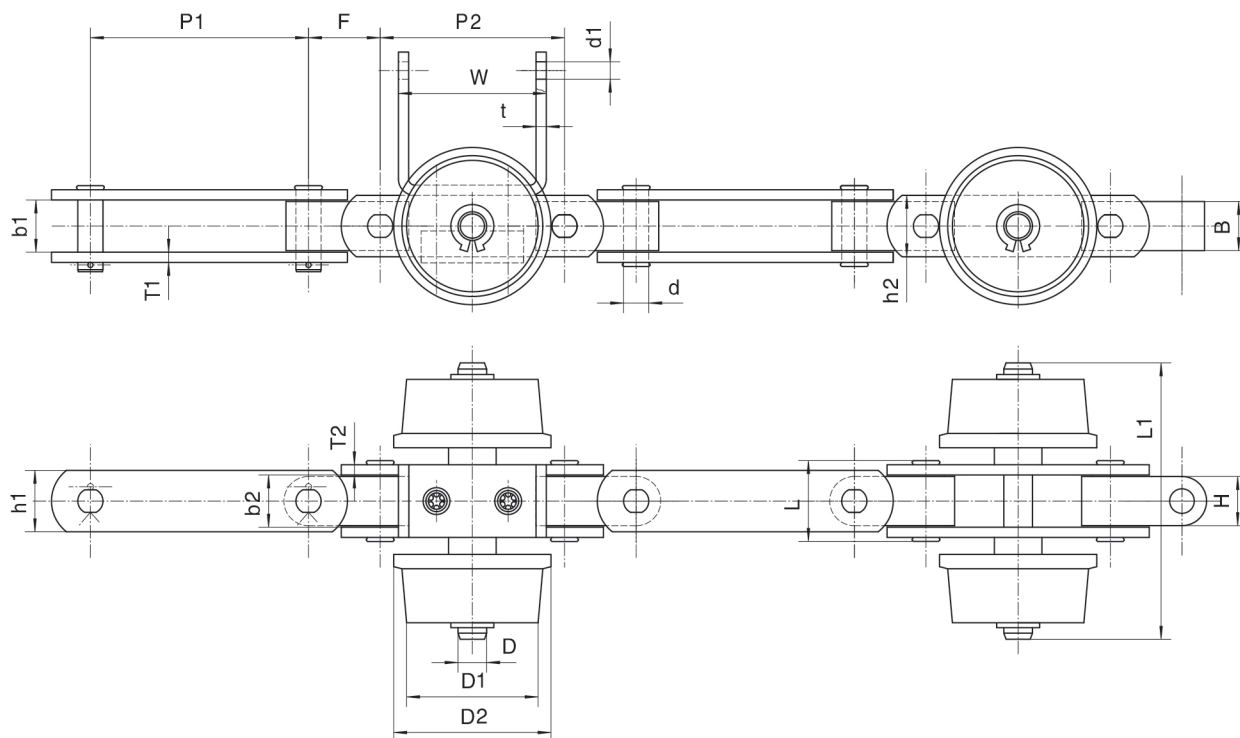


链号 Chain No.	节距 Pitch	内节内宽 Width between inner sidebar	滚轮外径 Bush diameter	销轴 Pin		链板 Sidebar			附件 ATT.			最小抗拉 强度 Ultimate tensile strength
	P1/F/P2 mm	b1/b2(min) mm	D1/D2(max) mm	d/D mm	L/L1 mm	h1/h2 mm	T1/T2 mm	B/H mm	W mm	T mm	d1 mm	Fu(min) kN
P (106.7+35+90)-U	106.5/35/90	25.5	59/77	12/14	39.7/135	30	5	24	72.2	4.6	8.5	132

悬挂链 Dependent chain

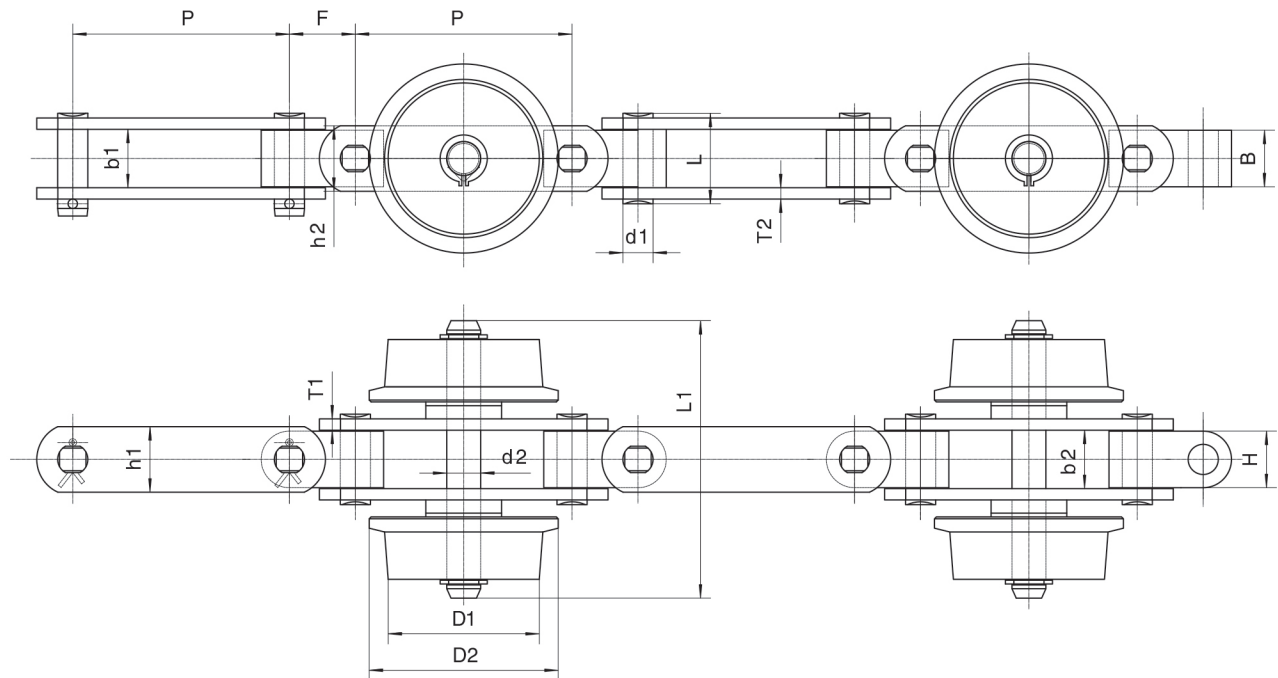


链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚轮外径 Roller diameter	销轴 Pin		链板 Sidebar		附件 ATT.	最小抗拉强度 Ultimate tensile strength
	P/F mm	b1/b2(min) mm	D1/D2(max) mm	d1/d2 mm	L/L1 mm	h1/h2 mm	T1/T2 mm	B/H mm	Fu(min) kN
P(115+35)	115/35	31	80/100.4	16/18	48/147.2	34.8	6	30	111

悬挂链 Dependent chain

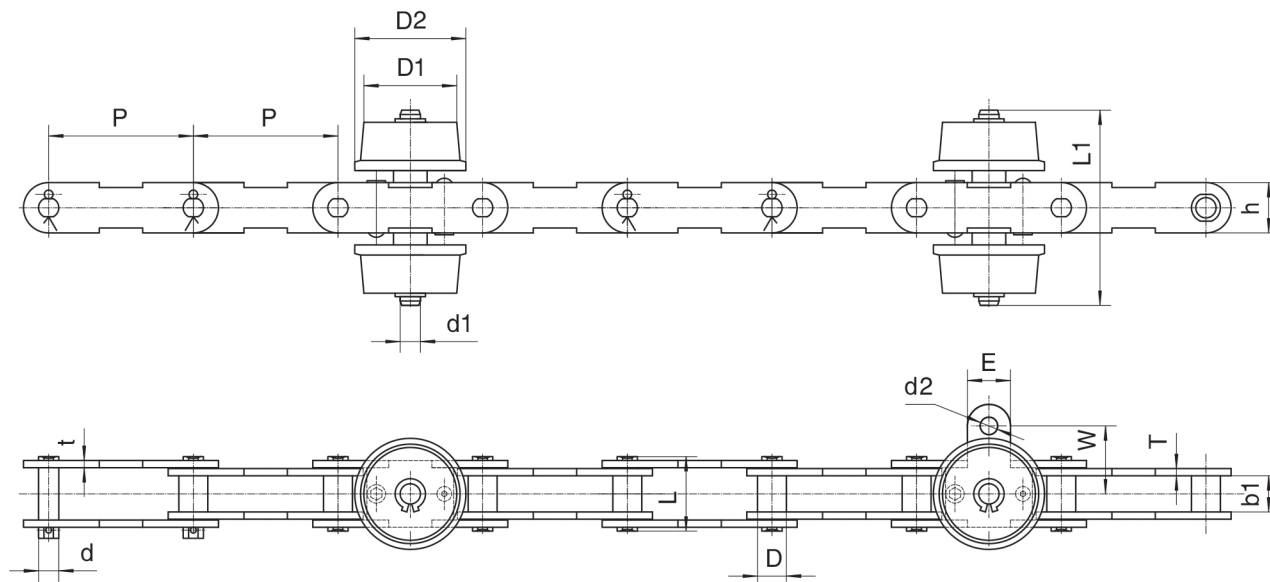


链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	套筒外径 Bush diameter	销轴 Pin		链板 Sidebar		滚轮 Roller	附件 ATT.			最小抗拉强度 Ultimate tensile strength
	P mm	b1(min) mm	D(max) mm	d mm	L/L1 mm	h mm	t/T mm	D1/D2 mm	W	E	d1	Fu(min) kN
P100-2SR	100	24.5	20	14	51.5/135	34.8	5	64/77	47.2	29.8	12.1	127

悬挂链 Dependent chain

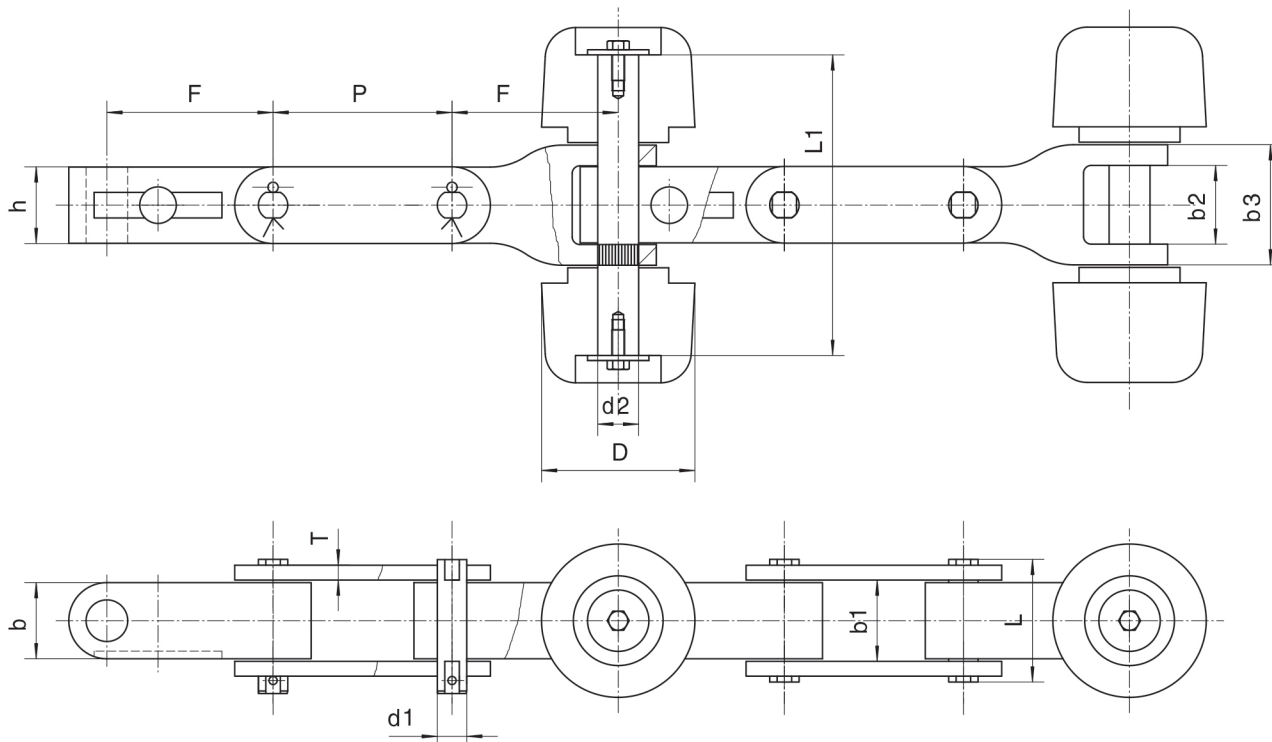

链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚轮外径 Roller diameter	销轴 Pin		链板 Sidebar		附件 ATT.		最小抗拉强度 Ultimate tensile strength
	P/F mm	b1/b2(min) mm	D(max) mm	d1/d2 mm	L/L1 mm	h mm	T mm	b	b3	Fu(min) kN
SZL65*70*65	70/65	30.8	60	11.5/16	47.3/116	30	5.8	30	47	124

晕猪链 Dizzy pig chain

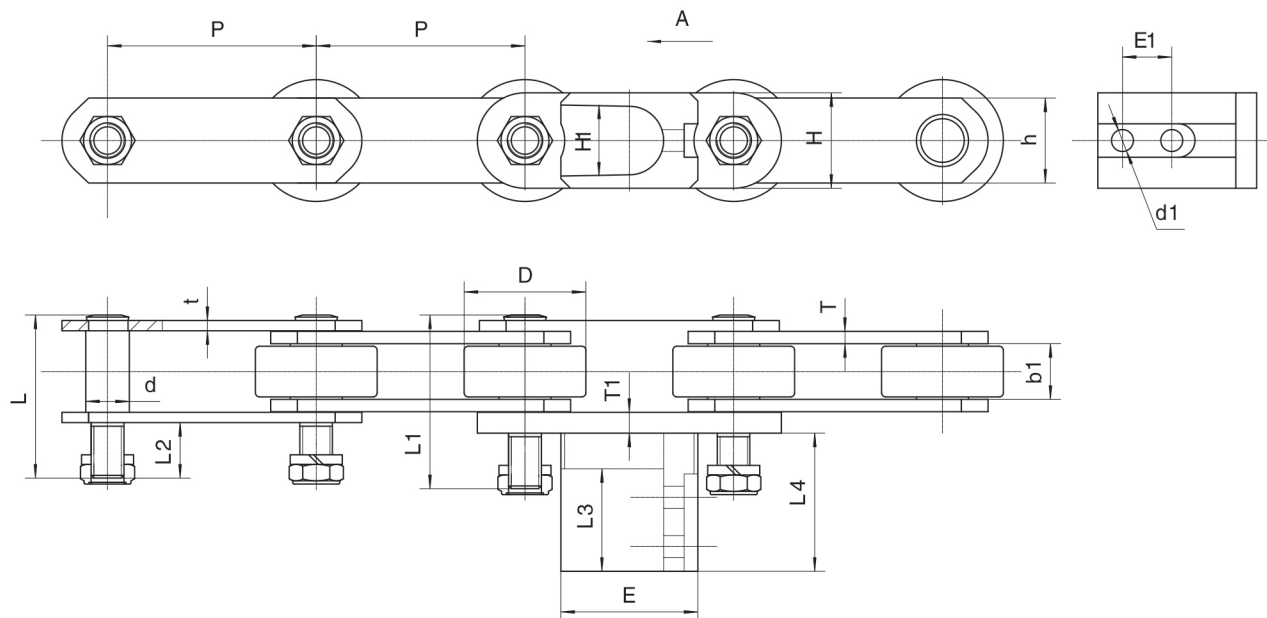

链号 Chain No.	节距 Pitch	内节内宽 Width between Inner sidebar	滚子外径 Roller diameter	销轴 Pin		链板 Sidebar		最小抗拉强度 Ultimate tensile strength
	P mm	b1(min) mm	D(max) mm	d mm	L/L1 mm	h mm	T/t mm	Fu(min) kN
P152.4-SD(M24)	152.4	39.5	88.9	31.8	117/124.7	62	9/7.5	338

链号	T1	H1	H	E	L3	L4	d1	E1
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
P152.4-SD(M24)	15	51.8	69.3	100	74.8	100.8	16	36



请访问我们的网站：
Please visit our website

Website: www.zhongyouchain.com



安徽黄山中友链条制造有限公司

HUANGSHAN ZHONGYOU CHAIN MANUFACTURE CO.,LTD.OF ANHUI

地址：安徽省绩溪生态工业园区徽源路9号

Add: No.9,Huiyuan Road,Ecological Industrial park,Jixi,Anhui,China

Tel: 0086-563-8155819

Fax: 0086-563-8156256

E-mail: sales9@zhongyouchain.com

Website: www.zhongyouchain.com

