



空心销轴链Hollow Pin Chain

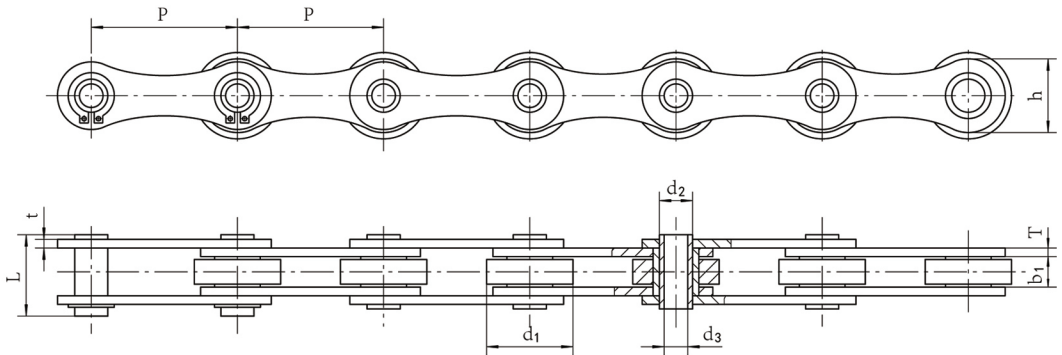


链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节内宽 Width between inner plates	空心销轴 Hollow Pin			链板 Plate		最小抗拉 强度 Ultimate tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ (min) mm	L mm	h mm	t/T mm	Fu(min) kN
A55INS700	41.75	17.1	19.6	11.11	8.2	36.7	20.5	2.9	18
260HPSS	41.75	17	20.5	11	8.3	40.2	21.4	3	13
262HPSS	50.8	30	10	11.5	8.2	27.7	25.5	3	32
262HPSS-N2	50.8	30	10	11.5	8.4	27.4	26	3	32
KC50SS	50	30	9.1	11	8.5	26.9	27	3	28.8

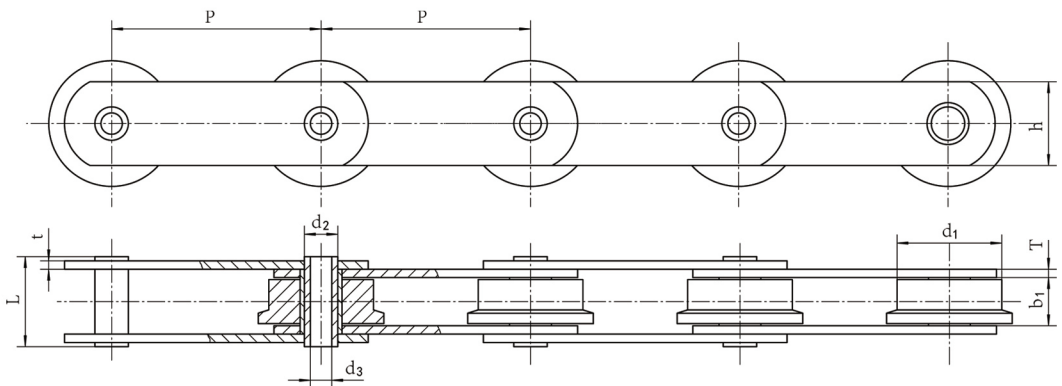


链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节内宽 Width between inner plates	空心销轴 Hollow Pin			链板 Plate		最小抗拉 强度 Ultimate tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ (min) mm	L mm	h mm	t/T mm	Fu(min) kN
P100HPSS	100	50	23	15.95	10.2	46	40	4	60

空心销轴链Hollow Pin Chain

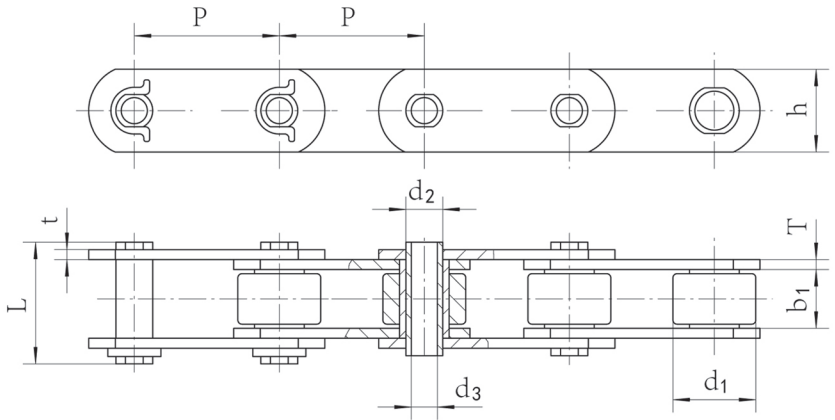

ANSI 链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节内宽 Width between inner plates	空心销轴 Hollow Pin			链板 Plate		最小抗拉 强度 Minimum tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ (min) mm	L mm	h mm	t/T mm	Fu(min) kN
35A	35	20	14	8.9	6.3	30.6	20	2.4	25.4
C30ASS	30	20	14	8.9	6.3	30.6	20	2.4	25.4

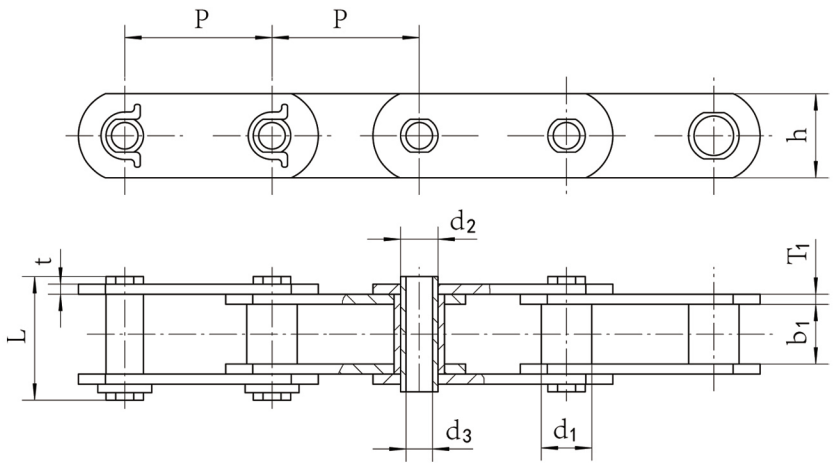

ANSI 链号 Chain No.	节距 Pitch	套筒 直径 Roller diameter	内节内宽 Width between inner plates	空心销轴 Hollow Pin			链板 Plate		最小抗拉 强度 Minimum tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ (min) mm	L mm	h mm	t/T mm	Fu(min) kN
35B	35	12	14	8.9	6.3	30.6	20	2.4	25.4
C30BSS	30	12	14	8.9	6.3	30.6	20	2.4	25.4
KC50ASS	50	18	22	12	9	42.6	30	3	57
KC28SS	28	10.16	9.4	7.06	5.2	25.6	15	3	19.6